




Scepter Antenna

Wandering Resident System

Part # 699

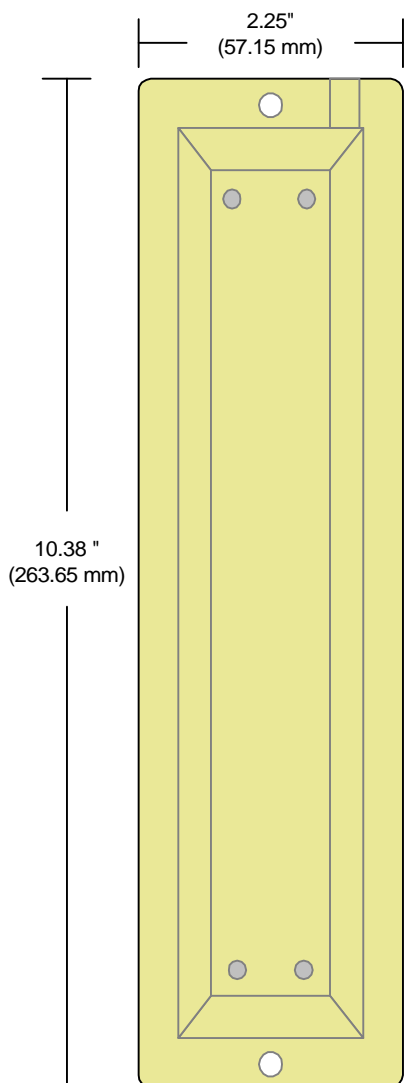

(Scepter Antenna in Protective Plastic Case)

(All unit dimensions are approximate.)

Features

- Protective Plastic Case (1 piece)
- Uses RF Shielded Wire for Optimum Performance
- Connects to Simple Screw Terminals
- Factory Tuned
- Easy Installation

Description

The 699 Scepter Antenna is used with all Wandering Resident Systems. When wired to a ADV 1000, ADV 1000DE, or Resident ID Exit Panel, the system should detect signals at ranges up to five feet (60 inches). The reception range of the Scepter Antenna is adjustable at the exit panel location for use with doors or areas smaller than five feet (60 inches). To cover a distance greater than five feet (60 inches) but less than ten feet (120 inches), two Scepter Antennas are required.

Electrical Specifications

Antenna Type	Ferrite Rod
Operating Frequency	430kHz
Operating Voltage	None. Antenna is passive

Physical Specifications

Case Construction	Protective Plastic
Case Mounting	Two (2) Screws and Anchors
Antenna Connector	Three (3) Screw Terminals
Connection Wire	22 AWG 2 Conductor w/ Drain Con